



**Aluminium die casting case**  
IE 1700 series, made of aluminium die casting, are possible to measure product weight accurately even in rough industrial environment.

**Highly legible LED display**  
IE-1700 series consist of large(30mm) and clear LED display. It makes customers to read the display easily even from a long distance

**Rechargeable battery operation**  
When the battery is fully recharged, IE series can be used for 50 hours with rechargeable battery

# IE-1700 SERIES

## Crane Scale

IE 1700 series have high quality and heavy-duty product in rough industrial environment. The product is operated according to OIML R76 and get the European CE certificate.



\*Wireless remote controller



# IE-1700 SERIES Crane Scale

### FEATURES

- 1/2,000~1/3,000 high external resolution
- Acquired the European CE certificate.
- Used washable and heavy-duty Aluminium die casting case
- High intensity hook and shackle, special loadcell for safety installation
- Compact design and easy to portable
- Battery operated (Standard AC adapter and rechargeable)
- Low battery and overload indication function
- Clear and large LED display (30mm)
- Standard Wireless remote controller
- Function key: on/off, Zero, Tare, Hold

### SPECIFICATIONS

Model	IE-1700 SERIES					
MAX Capacity (kg)	50	100	200	300	500	1000
Readability (kg)	0.02	0.05	0.1	0.1	0.2	0.5
External Resolution	1/2,000~1/3,000					
Maximum Tare	Full Tare					
Display Digit	5digits					
Display Type	LED (30mm)					
Function Key	Power, Zero, Tare, Hold					
Operating Power	DC 9V/1500mA					
Remote Control Range	Min. 10M					
Dimensions (mm)	225(W)x375(D)x130(H)			225 X 405 X 130		
Product Weight (kg)	4.0			4.2		


### INCLUDED ACCESSORY

- AC Adapter (9V/1500mA)
- Rechargeable battery
- Wireless remote controller



\*AC Adapter (9V/1000mA)

### DIMENSIONS

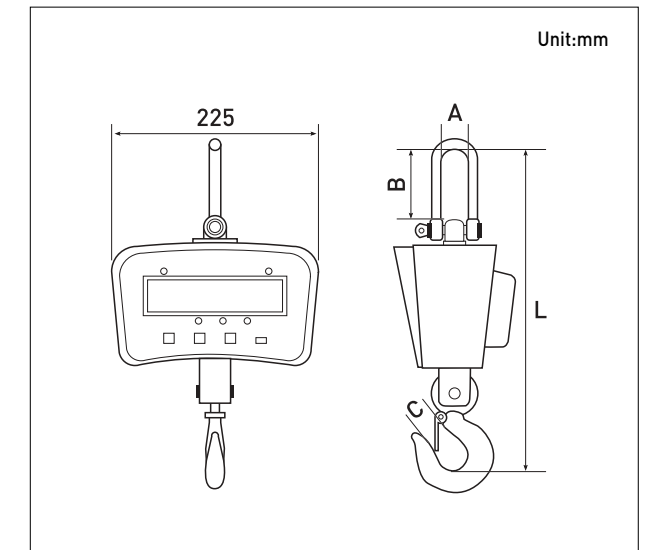

Model	IE-1700 SERIES					
MAX Capacity (kg)	50	100	200	300	500	1000
L(mm)	335			360		
A(mm)	20			25		
B(mm)	65			75		
C(mm)	20			20		



CAS BLDG., # 440-1, SUNGNAE DONG,  
GANGDONG GU, SEOUL, KOREA  
TEL\_ 82 2 2225 3500  
FAX\_ 82 2 475 4668

<http://www.globalcas.com>

Specifications are subject to change for improvement without prior notice.