


MK-CS1 Electronic Crane scale

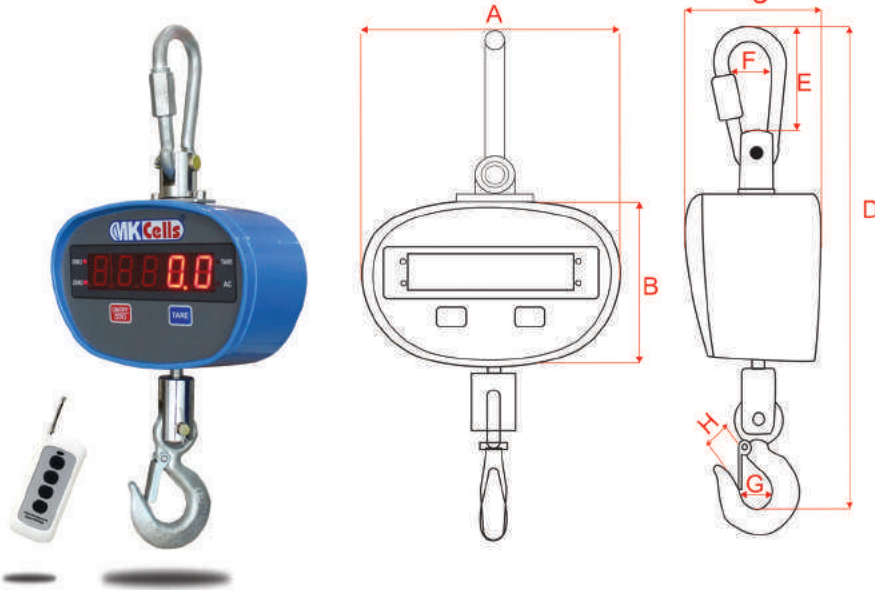

Features

- High-strength Aluminum Case (RED font)
- S style sensor design
- 360° Swivel hook
- Red LED display, digital height 25mm
- Build-in Lithium rechargeable battery
- Water splash proof design
- Remote control
- Capacity: 100kg-1t
- Heavy duty
- Easy to use

Functions:

- Zero
- Tare
- Hold
- Battery Supervision
- Overload Alarm/ Record
- Digital Calibration
- 3-point Linearity Correction
- lb/kg Switch
- Division Switch
- Gravity Acceleration Set

Aluminium

| Model | Max. Capacity kg | Division g | Crane scale size mm | | | | | | | | Weight kg |
|---------------|------------------|------------|---------------------|-----|----|-----|----|----|----|----|-----------|
| | | | A | B | C | D | E | F | G | H | |
| MK-CS1-100kg | 100 | 50 | 155 | 111 | 88 | 330 | 90 | 30 | 25 | 23 | 1.63 |
| MK-CS1-200kg | 200 | 100 | 155 | 111 | 88 | 330 | 90 | 30 | 25 | 23 | 1.63 |
| MK-CS1-300kg | 300 | 100 | 155 | 111 | 88 | 330 | 90 | 30 | 25 | 23 | 1.63 |
| MK-CS1-500kg | 500 | 200 | 155 | 111 | 88 | 330 | 90 | 30 | 25 | 23 | 1.63 |
| MK-CS1-1000kg | 1000 | 500 | 155 | 111 | 88 | 360 | 90 | 30 | 30 | 28 | 1.90 |



360° Swivel hook.

Specifications

| | |
|------------------|--------------------------------------|
| Accuracy class | Accuracy class OIML III |
| Tare range | Tare range 100%F.S. |
| Settling Time | Settling Time 5-8s |
| Safe Overload | Safe Overload 125%F.S. |
| Limited Load | 150%F.S. |
| Overload alarm | Overload alarm 100%F.S. |
| Battery | Lithium Rechargeable batter 6v 200mA |
| Work Temperature | Work Temperature -10°C~40°C |
| Battery life | 74 hours continuous operation |

Included Accessory

